


TONKAFLO® Pumps SERIES AS30000

FLOW RANGE—120 TO 380 GPM HEAD RANGE — 40 TO 420 PSI
 STAINLESS STEEL STAGED PUMP PERFORMANCE CURVES — 3565 RPM

CUSTOMER _____ 60 Hz
 MODEL _____

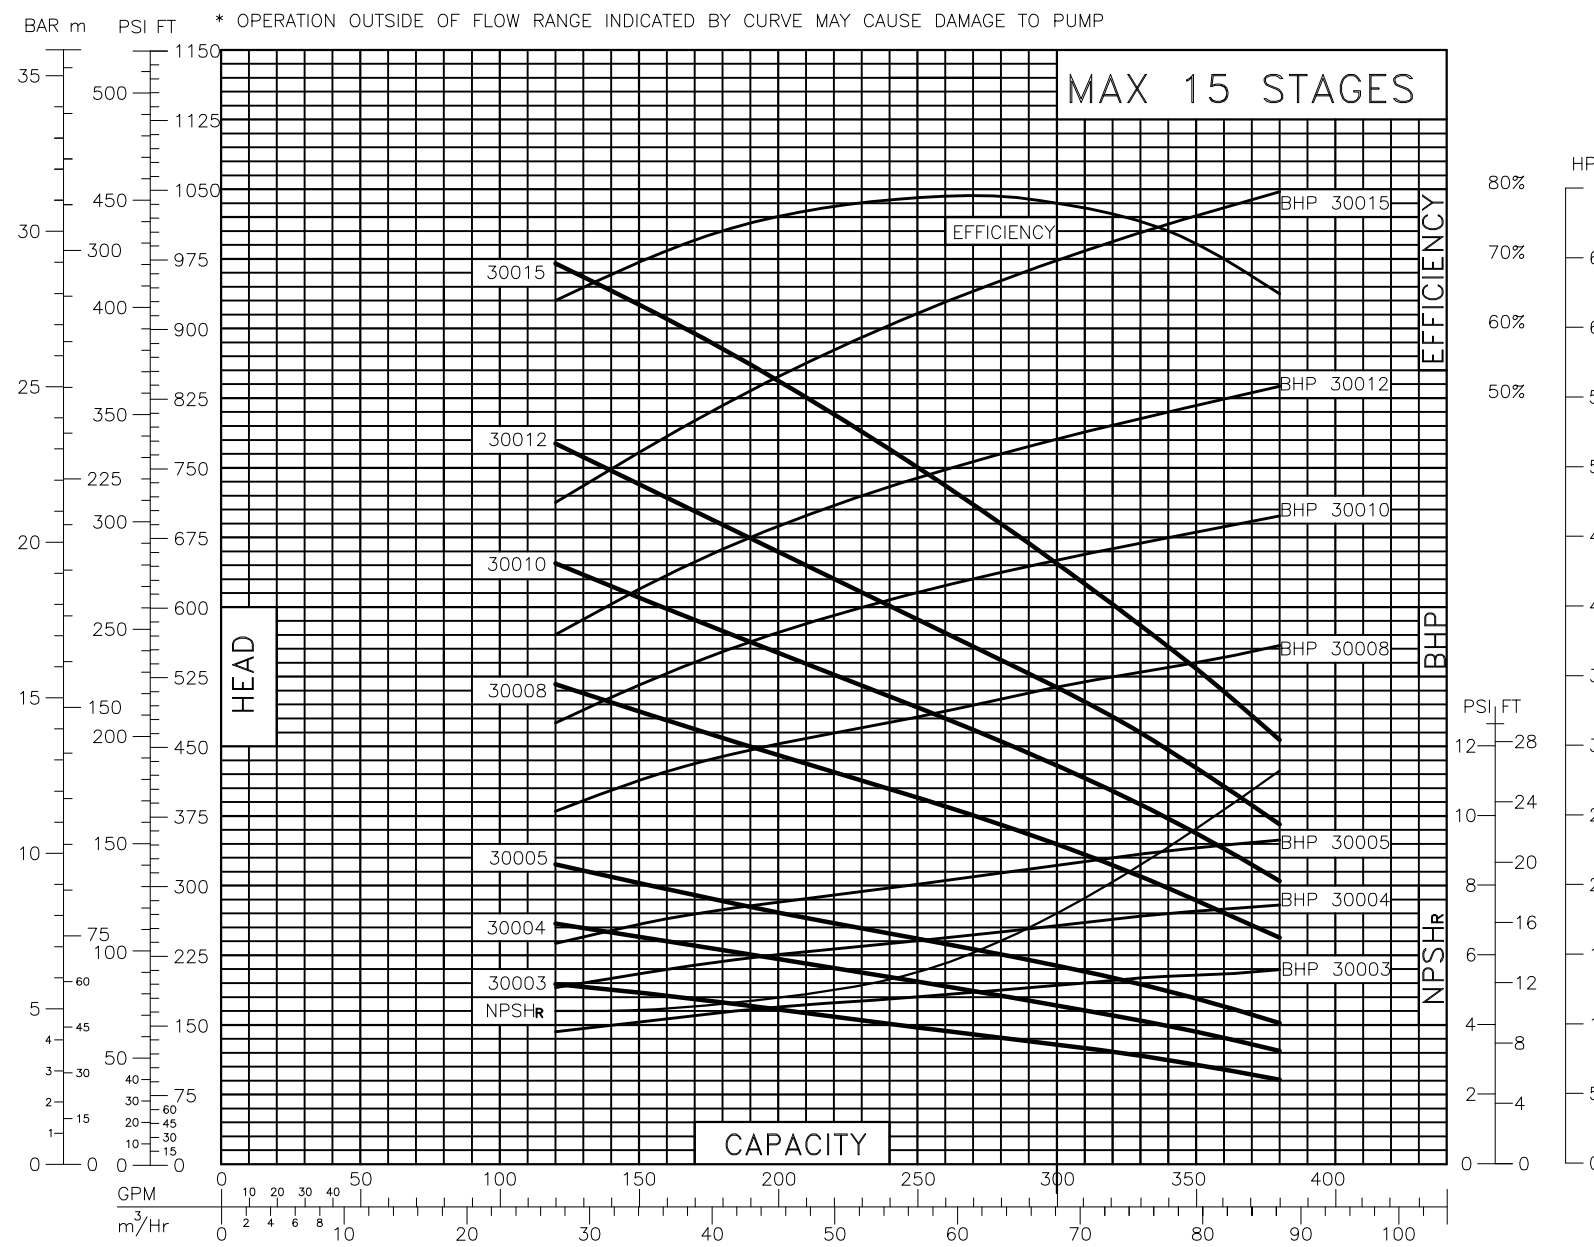

- NOTES:
1. BHP CURVES INDICATE HP REQUIREMENT AT THE PUMP SHAFT WHICH INCLUDES BEARING FRAME.
 MOTOR HP = BHP/MOTOR EFFICIENCY.
 2. DO NOT APPLY SERVICE FACTOR FOR SIZING THE MOTOR. FOR EXAMPLE, IF MOTOR HP CALCULATES TO 31.5 THE MOTOR SELECTION SHOULD BE 40 HP.
 3. FOR SIZES OTHER THAN THE STANDARD PUBLISHED, PLEASE CONSULT FACTORY.
 4. OPERATING ABOVE OR BELOW THE SPECIFIED RANGE COULD DAMAGE THE PUMP.



GE
 Water & Process Technologies
 5951 Clearwater Drive Minnetonka, MN 55343-8995 USA • Phone 866-439-2837 • WWW.GE.COM

REV	DESCRIPTION	ECO	DWN	APVD	DATE	CHKD	TOLERANCES UNLESS NOTED DECIMALS .X ± .XX ± .XXX ±	ANGLES ± FRAC ±	DRAWN BY AK	DATE 01OCT13	 GE Water & Process Technologies <small>GLOBAL HEADQUARTERS : TREVISO, PA USA +1-215-355-3300 WWW.GEWATER.COM</small>	CLIENT/JOB	TITLE DWG,TF,PRFM CURVES,30000, 4 INL,60HZ	SIZE C	DRAWING NO. 1313095	REV A
									CHECKED BY SS	DATE 27JAN14						
									APPROVED BY MG	DATE 27JAN14						
A	INITIAL RELEASE	15824	-	-	-	-	DIMENSIONS IN INCHES DO NOT SCALE		APPROVED BY	DATE		FILE AUTOCAD	MATERIAL 3113920	SCALE NONE	SHEET 10F1	